


## For all TRU-VIEW-XL, BI-DEEP, BI-SLIM, SYM-B, SYM & SYM-XT Models

TRU-VIEW-XL, BI-DEEP, BI-SLIM, SYM-B, SYM & SYM-XT electric fireplaces are suitable for installation in outdoor areas protected from direct water impingement. In addition to maintaining the listed mantel and combustibles clearances, a rain protection overhang factor of 1/2 shall be constructed to the front and to each side of the installed appliance. See illustration below. All wiring connections to line power shall be in accordance with local building code requirements.

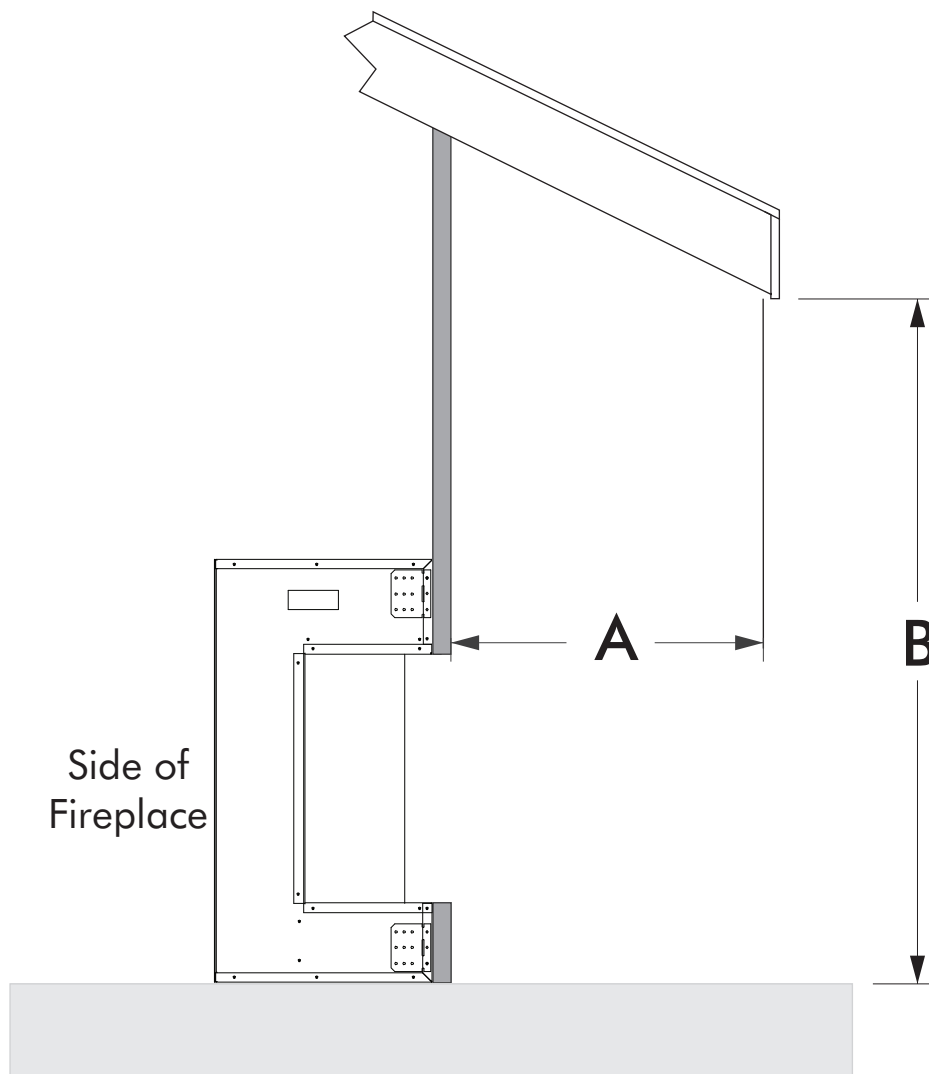

The overhang (A) must extend at least 1/2 the roof-line height (B).

Height is measured from the base of the fireplace.

For example: if the roof-line (B) is 8' above the base of the fireplace, the overhang (A) must be at least 4'.