



**Features**

Compatible with the Cool Wall Advantage kit

Certain size models meet requirements for efficiency rebates

**DISTINCTION SPECIFICATIONS AND FEATURES**

**DISTINCTION FULL LOAD CONTEMPORARY**

**D3615, D4815, D6315, D7215**

Single sided  
Direct vent

**Standard**

Concealed burner with Ice fireglass

Multi-function remote control

Remote Hi-Lo flame control<sup>†</sup>

Remote controlled fans

Invisimesh screen

Black reflective glass

Multicolor LED uplighting

Battery backup

**Options**

Cool Wall Advantage

Propane conversion kit

Adjustable trim kit

Fluted liners

<sup>†</sup>30% turndown, 50% turndown for D6315

**QUICK DIMENSIONS**

	D3615		D4815		D6315		D7215	
	UNIT	FRAM.	UNIT	FRAM.	UNIT	FRAM.	UNIT	FRAM.
<b>WIDTH</b>	51 <sup>7</sup> / <sub>8</sub>	59 <sup>3</sup> / <sub>4</sub>	63 <sup>7</sup> / <sub>8</sub>	71 <sup>3</sup> / <sub>4</sub>	72 <sup>7</sup> / <sub>8</sub>	79 <sup>1</sup> / <sub>2</sub>	87 <sup>7</sup> / <sub>8</sub>	95 <sup>3</sup> / <sub>4</sub>
<b>HEIGHT</b>	41	49 <sup>15</sup> / <sub>16</sub>	41	49 <sup>15</sup> / <sub>16</sub>	33 <sup>3</sup> / <sub>16</sub>	50 <sup>3</sup> / <sub>8</sub>	43 <sup>1</sup> / <sub>8</sub>	59 <sup>3</sup> / <sub>8</sub>
<b>DEPTH</b>	17 <sup>3</sup> / <sub>8</sub>	17 <sup>1</sup> / <sub>2</sub>	17 <sup>3</sup> / <sub>8</sub>	17 <sup>1</sup> / <sub>2</sub>	16 <sup>1</sup> / <sub>2</sub>	18	18 <sup>3</sup> / <sub>8</sub>	18 <sup>1</sup> / <sub>2</sub>
<b>VIEWING</b>	36 x 15 <sup>1</sup> / <sub>2</sub>		48 x 15 <sup>1</sup> / <sub>2</sub>		63 x 14		73 <sup>7</sup> / <sub>8</sub> x 15 <sup>1</sup> / <sub>2</sub>	

**BTU LISTING**

D3615\*1-2 / 35,000  
D4815\*1-2 / 40,000

D6315\*1-2 / 50,000  
D7215\*1-2 / 57,000


**EFFICIENCY**

D3615NI-2 / 71.96 P.4 1-15  
D4815NI-2 / 77.49 P.4 1-15  
D6315NI-2 / 62.69 P.4 1-15

D7215NI-2 / 73.86 P.4 1-15  
D3615LI-2 / 70.48 P.4 1-15  
D4815LI-2 / 76.58 P.4 1-15

D6315LI-2 / 60.49 P.4 1-15  
D7215LI-2 / 74.54 P.4 1-15

## DISTINCTION DIMENSIONS

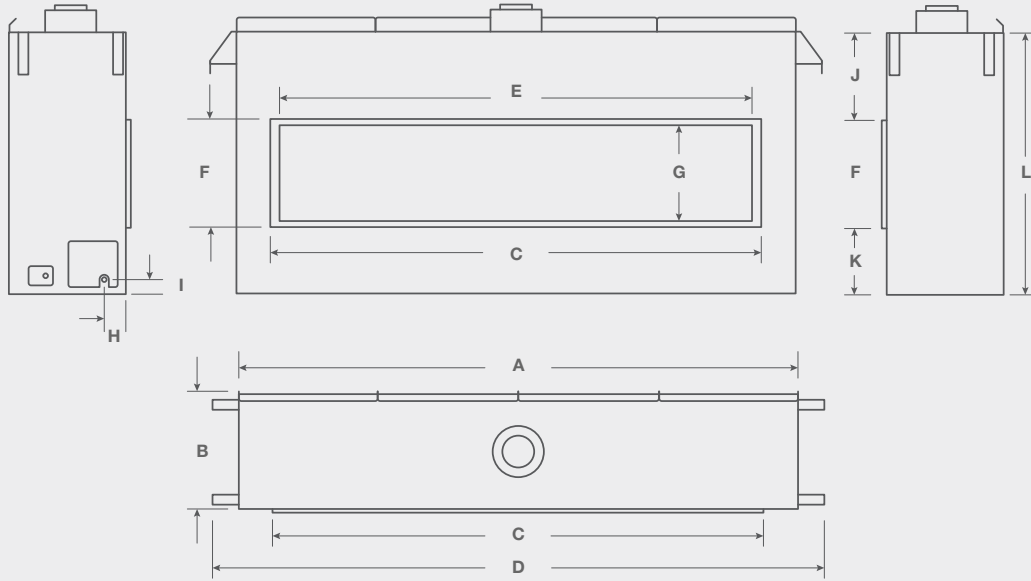

	A	B	C	D	E	F	G	H	I	J	K	L
D36	51 <sup>7</sup> / <sub>8</sub>	17 <sup>3</sup> / <sub>8</sub>	40 <sup>3</sup> / <sub>4</sub>	59 <sup>3</sup> / <sub>4</sub>	37 <sup>7</sup> / <sub>8</sub>	17	15 <sup>1</sup> / <sub>2</sub>	6 <sup>1</sup> / <sub>8</sub>	2 <sup>3</sup> / <sub>8</sub>	13 <sup>5</sup> / <sub>8</sub>	10 <sup>3</sup> / <sub>8</sub>	41
D48	63 <sup>7</sup> / <sub>8</sub>	17 <sup>3</sup> / <sub>8</sub>	52 <sup>13</sup> / <sub>16</sub>	71 <sup>3</sup> / <sub>4</sub>	49 <sup>7</sup> / <sub>8</sub>	17	15 <sup>1</sup> / <sub>2</sub>	6 <sup>1</sup> / <sub>8</sub>	2 <sup>3</sup> / <sub>8</sub>	13 <sup>5</sup> / <sub>8</sub>	10 <sup>3</sup> / <sub>8</sub>	41
D63	72 <sup>7</sup> / <sub>8</sub>	16	65 <sup>13</sup> / <sub>16</sub>	79 <sup>1</sup> / <sub>2</sub>	63 <sup>1</sup> / <sub>16</sub>	16 <sup>1</sup> / <sub>8</sub>	14	7	2 <sup>1</sup> / <sub>2</sub>	6	10 <sup>7</sup> / <sub>8</sub>	33 <sup>3</sup> / <sub>16</sub>
D72	87 <sup>7</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>8</sub>	76 <sup>3</sup> / <sub>4</sub>	95 <sup>1</sup> / <sub>16</sub>	73 <sup>7</sup> / <sub>8</sub>	17	15 <sup>1</sup> / <sub>2</sub>	5 <sup>1</sup> / <sub>2</sub>	2 <sup>3</sup> / <sub>8</sub>	13 <sup>5</sup> / <sub>8</sub>	10 <sup>3</sup> / <sub>8</sub>	41



MONTIGO / DISTINCTION / D6315 / ICE FIREGLASS



MONTIGO / DISTINCTION / D4815 / ICE FIREGLASS

### OPTIONS & FEATURES

REMOTE<sup>†</sup>  
RX200\*\*

WALL REMOTE  
REC1493

TRIM KIT<sup>†</sup>  
DT\*\*

UPLIGHTING<sup>†</sup>  
MCLEDDL63

### LINERS

ASH FLUTED  
DBK\*\*AF

TUSCAN FLUTED  
DBK\*\*TF

BLACK GLASS<sup>†</sup>  
RBGD63

<sup>†</sup>Standard on Distinction units

# Cool Wall Advantage

Diverting heat away from the wall, keeping your TV or artwork safe



## TV kits include

---

Louver

---

Plenum

---

Collars

---

Requires flex venting

## TV KIT CODES

36" WALL KIT / HDKPD36

48" WALL KIT / HDKPD48

63" WALL KIT / HDKPD63

72" WALL KIT / HDKPD72

MONTIGO / COOL WALL ADVANTAGE / SIDEWALL / HORIZONTAL



Cool Wall Advantage TV and sidewall kit plenums are finished with aluminum and are ready to match any interior with your choice of high temperature paint.

MONTIGO / COOL WALL ADVANTAGE / SIDEWALL / VERTICAL



## Sidewall kits include

---

2 Louvers

---

2 Plenums

---

Collars

---


Requires flex venting

## SIDEWALL KIT CODES


HORIZONTAL WALL KIT / HDKSD

VERTICAL WALL KIT / HDKSDV


## COOL WALL KIT DIMENSIONS

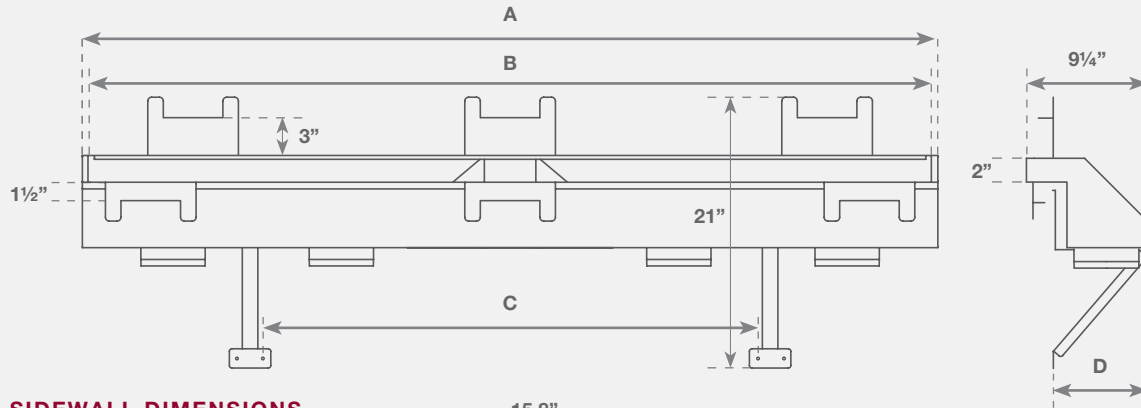

## SIDEWALL DIMENSIONS

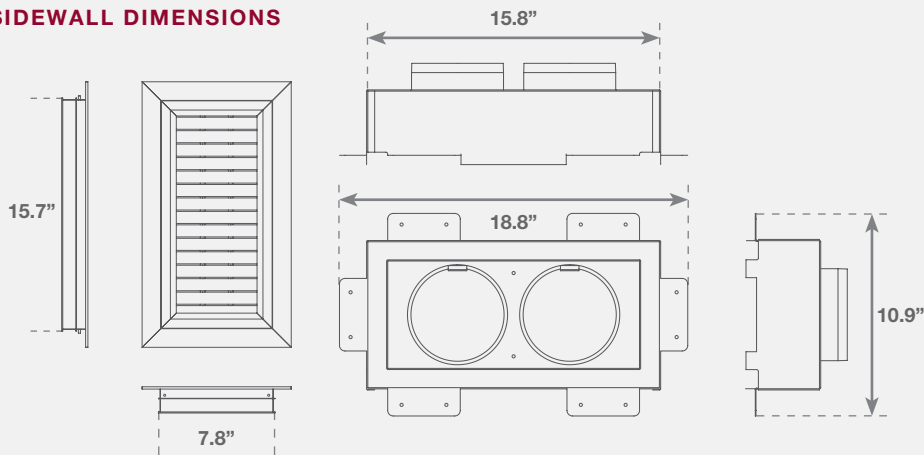

	A	B	C	D
36" TV Kit	39 <sup>15</sup> / <sub>16</sub>	38 <sup>7</sup> / <sub>8</sub>	N/A	7 <sup>1</sup> / <sub>16</sub>
48" TV Kit	51 <sup>7</sup> / <sub>8</sub>	50 <sup>7</sup> / <sub>8</sub>	30 <sup>1</sup> / <sub>2</sub>	7 <sup>1</sup> / <sub>16</sub>
63" TV Kit	66 <sup>1</sup> / <sub>16</sub>	65 <sup>1</sup> / <sub>16</sub>	38 <sup>3</sup> / <sub>16</sub>	6 <sup>5</sup> / <sub>16</sub>
72" TV Kit	75 <sup>13</sup> / <sub>16</sub>	74 <sup>13</sup> / <sub>16</sub>	39 <sup>7</sup> / <sub>16</sub>	7 <sup>1</sup> / <sub>16</sub>

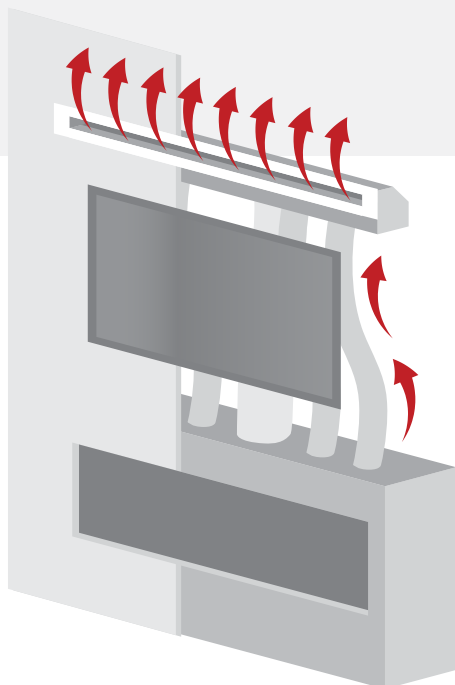

### 190°F / 87°C Heat Vent

Heat is diverted through the Cool Wall Advantage kit, safely bypassing the space above the fireplace.

### 100°F / 38°C Cool Wall\*

Wall temperature is cool, creating an area safer for mounting a TV, or hanging artwork.

### 550°F / 287°C Glass

Reduced glass temperature, combined with the provided screen creates a safe viewing area.

\* 100°F / 38°C temperature taken at 30" above fireplace opening



MONTIGO / COOL WALL ADVANTAGE / TV KIT /

# Unit Specifications

## Icon Legend

AVAILABLE +

NOT AVAILABLE -


DEDICATED ◊

STANDARD ○


	BTU Natural Gas	BTU Liquid Propane	Gas Supply Pressure NG (shown in w.c.)	Gas Supply Pressure LP (shown in w.c.)	Venting	Clearance Sides	Clearance Back	Clearance Floor	Front viewing area	Front glass type	Standard media	Powervent	Remote control	Fans	Uplighting	Downlighting
D3615*1-2	35,000	35,000	11	13.8	5"/8" <sup>a</sup>	4	1/2	0	36 x 14 <sup>7</sup> / <sub>8</sub>	Ceramic	HW1157	+	○	○	○	-
D4815*1-2	40,000	40,000	11	13.8	5"/8" <sup>a</sup>	4	1/2	0	48 x 14 <sup>7</sup> / <sub>8</sub>	Borosilicate	HW1157	+	○	○	○	-
D6315*1-2	50,000	50,000	11	13.8	5"/8"	3 <sup>1</sup> / <sub>2</sub>	2	0	63 <sup>1</sup> / <sub>2</sub> x 14	Borosilicate	HW1157	+	○	○	○	-
D7215*1-2	57,000	57,000	11	13.8	5"/8"	4	1/2	0	73 <sup>7</sup> / <sub>8</sub> x 15 <sup>1</sup> / <sub>2</sub>	Neoceramic	HW1157	+	○	○	○	-
D3615ST*1-2	35,000	35,000	11	13.8	5"/8" <sup>a</sup>	4	1/2	0	36 x 14 <sup>7</sup> / <sub>8</sub>	Ceramic	HW1157	+	○	-	○	-
D4815ST*1-2	40,000	40,000	11	13.8	5"/8" <sup>a</sup>	4	1/2	0	48 x 14 <sup>7</sup> / <sub>8</sub>	Borosilicate	HW1157	+	○	-	○	-
D6315ST*1-2	50,000	50,000	11	13.8	5"/8"	3 <sup>1</sup> / <sub>2</sub>	2	0	63 <sup>1</sup> / <sub>2</sub> x 14	Borosilicate	HW1157	+	○	-	○	-
D7215ST*1-2	57,000	57,000	11	13.8	5"/8"	4	1/2	0	73 <sup>7</sup> / <sub>8</sub> x 15 <sup>1</sup> / <sub>2</sub>	Neoceramic	HW1157	+	○	-	○	-

<sup>a</sup>Can be reduced to 4"7"

## DISTINCTION SINGLE SIDED FRAMING

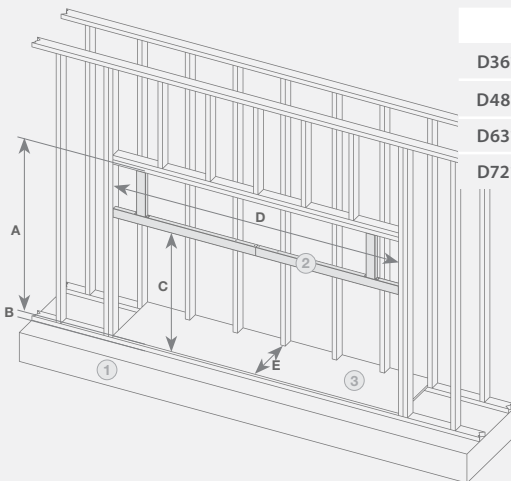

	A	B	C	D	E	F	G	H	I	J	K
D3615	49 <sup>15</sup> / <sub>16</sub>	2 <sup>1</sup> / <sub>4</sub>	N/A	59 <sup>3</sup> / <sub>4</sub>	17 <sup>1</sup> / <sub>2</sub>	10 <sup>7</sup> / <sub>8</sub>	40 <sup>7</sup> / <sub>8</sub>	24	17 <sup>1</sup> / <sub>8</sub>	12 <sup>9</sup> / <sub>16</sub>	53 <sup>11</sup> / <sub>16</sub>
D4815	49 <sup>15</sup> / <sub>16</sub>	2 <sup>1</sup> / <sub>4</sub>	N/A	71 <sup>1</sup> / <sub>2</sub>	17 <sup>1</sup> / <sub>2</sub>	10 <sup>7</sup> / <sub>8</sub>	52 <sup>7</sup> / <sub>8</sub>	24	17 <sup>1</sup> / <sub>8</sub>	12 <sup>9</sup> / <sub>16</sub>	53 <sup>11</sup> / <sub>16</sub>
D6315	50 <sup>3</sup> / <sub>8</sub>	2 <sup>1</sup> / <sub>4</sub>	33 <sup>11</sup> / <sub>16</sub>	79 <sup>1</sup> / <sub>2</sub>	18	8 <sup>1</sup> / <sub>8</sub>	66 <sup>1</sup> / <sub>8</sub>	24 <sup>5</sup> / <sub>8</sub>	16 <sup>1</sup> / <sub>2</sub>	13	54 <sup>3</sup> / <sub>8</sub>
D7215	59 <sup>3</sup> / <sub>8</sub>	2 <sup>1</sup> / <sub>4</sub>	41 <sup>11</sup> / <sub>16</sub>	95 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>2</sub>	10 <sup>7</sup> / <sub>8</sub>	76 <sup>7</sup> / <sub>8</sub>	33 <sup>1</sup> / <sub>16</sub>	17 <sup>1</sup> / <sub>8</sub>	12 <sup>9</sup> / <sub>16</sub>	63 <sup>3</sup> / <sub>8</sub>




## DISTINCTION ST FRAMING


Use single sided framing chart except for dimension "E". this measurement is from edge to edge of the platform.

	E
D3615ST	17 <sup>11</sup> / <sub>16</sub>
D4815ST	17 <sup>11</sup> / <sub>16</sub>
D6315ST	18 <sup>7</sup> / <sub>16</sub>
D7215ST	17 <sup>11</sup> / <sub>16</sub>

## COOL WALL ADVANTAGE FRAMING

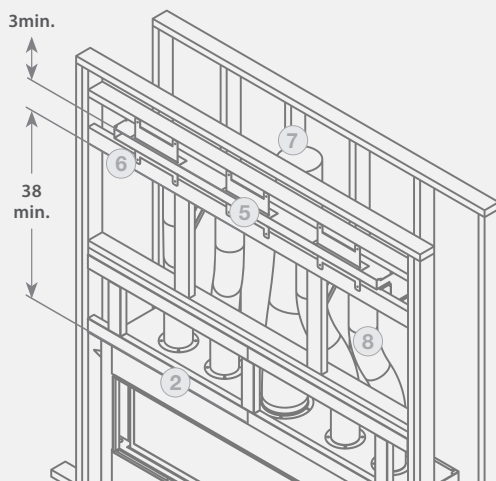

## COOL WALL ADVANTAGE SIDEWALL FRAMING

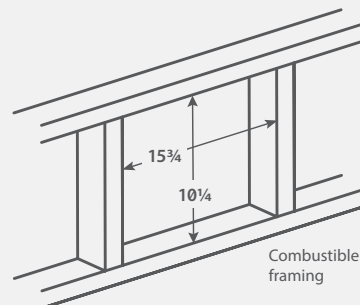

Dimensions are the same for both horizontal and vertical sidewall kits

36" size features 2 venting holes

## Legend

1	Floor structure
2	Non-combustible metal framing (not used on 36, 48)
3	Fireplace platform
4	Concrete board
5	Cool Wall Advantage opening
6	2x4 on edge
7	Main vent
8	5" venting

See through versions include two sets of non combustible framing and concrete board.

36" and 48" version does not include non combustible framing kit

Chase venting is needed for safe operation of the unit, see instruction manual for detailed instructions

Minimum distance from unit base to ceiling is 89"