



SÓLAS

CONTEMPORARY FIRE

SÓLAS

TRANSFORM ANY ROOM IN YOUR HOUSE WITH EASE, WITH ONE OF OUR CONTEMPORARY WALL MOUNTED, DIRECT VENT GAS FIREPLACES. DEVELOPED WITH TODAY'S DISCERNING HOMEOWNER IN MIND, AND OFFERING A UNIQUE ALTERNATIVE TO THE TRADITIONAL "LOG FIRE" STOVES & FIREPLACES.



ONE6, shown with Combo Stainless Steel & High Gloss Black surround

WHY SÓLAS?

CONTEMPORARY DESIGN

The SÓLAS line of highly efficient contemporary fireplaces offer all of the features in demand by today's most discerning, design conscious homeowner.

SIMPLE OPERATION

SÓLAS Fireplaces can be operated manually, or THERMOSTATICALLY using the hand held REMOTE CONTROL (standard). An optional wall switch is also available for manual operation. Flame height can be raised or lowered to achieve desired effect.

PORCELAIN ENAMEL

SÓLAS Fireplaces provide amazing radiant heat using the combination of reflective glass embers and porcelain enamel panels. The panels provide reflective radiant heat, in addition to several layers of fire light—all of which enhance the soothing dancing flames.

EASE OF INSTALLATION

The SÓLAS line of wall mount fireplaces allows for installation throughout the home, without the need for major renovations. Simply hang on the wall and vent to the outside, to add a dramatic focal point to any room.

FUEL SPECIFIC / LP OR NG

SÓLAS Fireplaces are ordered fuel specific, LP or NG. This ensures that every unit is fully tested at the factory for use with your specific gas type.

REFLECTIVE BURNER

SÓLAS Fireplaces use hundreds of reflective glass embers on the burner pan to cast light throughout the fireplace and surrounding area.

INSTALLATION FLEXIBILITY

SÓLAS Fireplaces require minimal clearances to combustibles and take up very little space in a room. The fireplaces can be located as low as 3" from the floor or positioned perfectly to "couch height". Overall depth is just 7⁵/₈".

AUTOMATIC PILOT IGNITION

The pilot flame for SÓLAS Fireplaces can be ignited using the remote control. No more getting down on your knees to light the pilot!

BATTERY OPERATION

SÓLAS Fireplaces operate using a Mertik Maxitrol® control system which runs on 4 AA batteries, so there is no need to hard wire power to the fireplace, and, in a power outage you still have heat. Normal battery life is one heating season.

A VARIETY OF CONTEMPORARY MODELS TO CHOOSE FROM:

With a full range of models to choose from, the SÓLAS can satisfy any heating requirement, and room size.

FORTY6

Linear Wall Mount Direct Vent Gas Fireplace



TWENTY6

Landscape Wall Mount Direct Vent Gas Fireplace



ONE6

Portrait Wall Mount Direct Vent Gas Fireplace



TWENTY6 FI

Direct Vent Gas Fireplace Insert



ONE6 FS

Freestanding Direct Vent Gas Stove







FORTY6 | LINEAR WALL MOUNT DIRECT VENT GAS FIREPLACE

The SÓLAS FORTY6 is a linear wall mount, direct vent, gas fireplace. Not a built-in, the SÓLAS FORTY6 features a unique wall mount design allowing for installation throughout the home, without the need for major renovations. Simply hang on the wall to add a dramatic focal point to any room. The SÓLAS FORTY6 is a highly efficient contemporary fireplace offering all of the features in demand by today's most discerning, design conscious homeowner. Despite its sleek profile, the unit's reflective porcelain enamel firebox serves to reflect the flames, adding depth to the flame picture, for a very dramatic effect. As standard, the fireplace comes with a state of the art remote control, which not only allows you to light and operate the fireplace but can also be programmed to control the fireplace thermostatically, automatically controlling your desired room temperature.

FEATURES

- Wall Mounted
- Ease of Installation, Simply Hangs on the Wall
- Direct Vent Technology, Heater Rated
- Natural Gas or Propane
- 5 Interchangeable Surround Options
- Reflective Porcelain Enamel Liners
- Programmable Thermostatic Remote Control, Standard

SPECIFICATIONS

BTU Rate Range (NG)	29,000 - 19,000/hr
BTU Rate Range (LP)	29,000 - 19,000/hr
Glass Viewing Area	46" W
Dimensions	58 ³ / ₈ " W x 25 ¹ / ₄ " H x 8" D
Maximum Observed Steady State Efficiency	78.5% / 79.0%
Remote Control	Included
Venting	20' Vertical & 10' Horizontal

CLEARANCE

Fireplace to Side Walls	6"
Fireplace to Corner	6"
Fireplace to Ceiling	8"
Fireplace to Floor	3"

SURROUND OPTIONS



High Gloss Black



Stainless Steel



Combo Stainless Steel & High Gloss Black



Steel Grey



Satin Black

TWENTY6 | LANDSCAPE WALL MOUNT DIRECT VENT GAS FIREPLACE

The SÓLAS TWENTY6 brings you the style you desire with effortless installation. A new concept in fireplaces, the SÓLAS TWENTY6 is a revolutionary wall mount, direct vent, gas fireplace. Simply hang the unit on an outside wall and direct vent for a simple, effortless, installation. On an inside wall, the fireplace can be installed with venting runs of up to 20ft vertical and 10ft horizontal, allowing for a wide range of installation options throughout your home. The SÓLAS TWENTY6 is a 38¾" wide, 19,000 BTU "landscape" format unit designed for larger room settings. This contemporary model is heater rated and offers a spectacular flame picture which is enhanced by the reflective porcelain enamel firebox liners. The unit offers today's discerning consumer designer styling with a wide range of surround colors and options available. The surround can be changed in a matter of seconds, without the use of tools. So, if you decide to change your room's decor the fireplace can be updated quickly and inexpensively to complement the new look of your room. The SÓLAS TWENTY6 also has an optional Corner Mounting Kit available, allowing the heater to be mounted directly into a corner, saving space, and, creating a unique focal point in your room.

FEATURES

- Wall Mounted
- Ease of Installation, Simply Hangs on the Wall
- Direct Vent Technology, Heater Rated
- Natural Gas or Propane
- 5 Interchangeable Surround Options
- Automatic Pilot Ignition
- Automatic Hi/Lo Flame Height Adjustment
- Programmable Thermostatic Remote Control, Standard
- Optional Corner Installation Kit Available

SPECIFICATIONS

BTU Rate Range (NG)	19,000 - 11,000/hr
BTU Rate Range (LP)	19,000 - 11,000/hr
Glass Viewing Area	26" W
Dimensions	38¾" W x 27¼" H x 7⅝" D
Maximum Observed Steady State Efficiency	78.8% / 79.5%
Remote Control	Included
Venting	20' Vertical & 10' Horizontal

CLEARANCE

Fireplace to Side Walls	6"
Fireplace to Corner	6"
Fireplace to Ceiling	8"
Fireplace to Floor	3"

SURROUND OPTIONS



High Gloss Black



Stainless Steel



Combo Stainless Steel & High Gloss Black



Steel Grey



Satin Black





ONE6 | PORTRAIT WALL MOUNT DIRECT VENT GAS FIREPLACE

The SÓLAS ONE6 brings you the same contemporary style as the SÓLAS TWENTY6, but in a portrait format. The SÓLAS ONE6 is a revolutionary wall mount, direct vent, gas fireplace. Simply hang the unit on an outside wall and direct vent for a simple, effortless, installation. On an inside wall, the fireplace can be installed with venting runs of up to 20' vertical and 10' horizontal, allowing for a wide range of installation options throughout your home. The SÓLAS ONE6 is a 23½" wide, 13,500 BTU "portrait" format unit designed for smaller room settings. This contemporary model is heater rated and offers a spectacular flame picture which is enhanced by the reflective porcelain enamel firebox liners. The unit offers today's discerning consumer designer styling with a wide range of surround colors and options available. The surround can be changed in a matter of seconds, without the use of tools. So, if you decide to change your room's decor the fireplace can be updated quickly and inexpensively to complement the new look of your room. The SÓLAS ONE6 also has an optional Corner Mounting Kit available, allowing the heater to be mounted directly into a corner, saving space, and, creating a unique focal point in your rooms.

FEATURES

- Wall Mounted
- Ease of Installation, Simply Hangs on the Wall
- Direct Vent Technology, Heater Rated
- Natural Gas or Propane
- 5 Interchangeable Surround Options
- Automatic Pilot Ignition
- Automatic Hi/Lo Flame Height Adjustment
- Programmable Thermostatic Remote Control, Standard
- Optional Corner Installation Kit Available

SPECIFICATIONS

BTU Rate Range (NG)	13,500 - 7,500/hr
BTU Rate Range (LP)	13,500 - 7,500/hr
Glass Viewing Area	16" W
Dimensions	23½" W x 30" H x 7⅝" D
Maximum Observed Steady State Efficiency	79.0% / 77.8%
Remote Control	Included
Venting	20' Vertical & 10' Horizontal

CLEARANCE

Fireplace to Side Walls	6"
Fireplace to Corner	6"
Fireplace to Ceiling	8"
Fireplace to Floor	3"

SURROUND OPTIONS



High Gloss Black



Stainless Steel



Combo Stainless Steel
& High Gloss Black



Steel Grey



Satin Black

TWENTY6 FI | DIRECT VENT GAS FIREPLACE INSERT

The SÓLAS TWENTY6 FI is a uniquely contemporary fireplace insert which offers consumers the option of upgrading their existing masonry or factory built wood-burning fireplace to a high efficiency direct vent gas heater with clean modern lines. The unit is designed to maximize the fire view across its 26" wide burner, with the flame picture being further enhanced by the reflective porcelain enamel firebox liners. The SÓLAS TWENTY6 FI is compact in size fitting even the smallest factory built units, using a standard 2 x 3" aluminum reline kit for venting. It comes standard with a variable speed convection blower and a programmable thermostatic remote control.

FEATURES

- High Efficient, Gas Fireplace Insert
- Natural Gas or Propane
- Three Surround Options
- Reflective Porcelain Enamel Liner
- Programmable Thermostatic Remote Control, Standard

SPECIFICATIONS

BTU Rate Range (NG)	19,500 - 11,500/hr
BTU Rate Range (LP)	19,500 - 11,500/hr
Glass Viewing Area	26" W x 10½" H
Dimensions	29¾" W x 20¾" H x 14¼" D
Maximum Observed Steady State Efficiency	79.0% / 80.0%
Minimum Fireplace Opening	14¼" D
Variable Speed Blower	Standard
Remote Control	Included
Venting	2 x 3" Liners, 36' Maximum

SURROUND SIZES

Standard Surround Size	38" W x 26" H
Optional Surround Sizes	40" W x 29" H 44" W x 32" H

SURROUND OPTIONS



Satin Black



Combo Satin Black & Stainless Steel



Combo Satin Black & Steel Grey





ONE6 FS | FREESTANDING DIRECT VENT GAS STOVE

The SÓLAS ONE6 FS is a contemporary freestanding, direct vent gas stove with clean lines and elegant proportions. The unit is designed to maximize the fire view from the 13,500 BTU burner, with the flame picture being enhanced by the reflective porcelain enamel firebox liners. The SÓLAS ONE6 FS can be set up for top or rear venting, and can be direct vented (without any vertical rise) using 4 x 6^{5/8}" coaxial pipe. A programmable thermostatic remote control is supplied as standard, and allows for either manual operation or, can be programmed to maintain your room temperature at a set comfort level. An optional variable speed blower is also available.

FEATURES

- High Efficiency, Direct Vent Gas Stove
- Natural Gas or Propane
- Three Color Options
- Reflective Porcelain Firebox Liners
- Programmable Thermostatic Remote Control, Standard

SPECIFICATIONS

BTU Rate Range (NG)	13,500 - 7,500/hr
BTU Rate Range (LP)	13,500 - 7,500/hr
Glass Viewing Area	16" W
Dimensions	23 ^{1/8} " W x 18 ^{7/8} " D x 40 ^{3/4} " H
Maximum Observed Steady State Efficiency	79.0% / 77.8%
Variable Speed Convection Blower	Optional
Remote Control	Standard
Venting	Top or Rear Vent up to 20' Vertical & 10' Horizontal

SURROUND OPTIONS



Satin Black



Combo Satin Black &
Steel Grey



Steel Grey

SPECIFICATION MATRIX

Specifications	FORTY6	TWENTY6	ONE6	TWENTY6 FI	ONE6 FS
BTU Rate Range (NG)	29,000 - 19,000/hr	19,000 - 11,000/hr	13,500 - 7,500/hr	19,500 - 11,500/hr	13,500 - 7,500/hr
BTU Rate Range (LP)	29,000 - 19,000/hr	19,000 - 11,000/hr	13,500 - 7,500/hr	19,500 - 11,500/hr	13,500 - 7,500/hr
Glass Viewing Area	46" W	26" W	16" W	26" W	16" W
Dimensions	58 $\frac{3}{8}$ " W x 25 $\frac{1}{4}$ " H x 8" D	38 $\frac{3}{4}$ " W x 27 $\frac{1}{4}$ " H x 7 $\frac{5}{8}$ " D	23 $\frac{1}{2}$ " W x 30" H x 7 $\frac{5}{8}$ " D	29 $\frac{3}{4}$ " W x 20 $\frac{3}{4}$ " H x 14 $\frac{1}{4}$ " D	23 $\frac{1}{8}$ " W x 18 $\frac{7}{8}$ " D x 40 $\frac{3}{4}$ " H
Clearance (Side / Corner)	6" / 6"	6" / 6"	6" / 6"	4.5"	1" / 1"
Clearance (Ceiling / Floor)	8" / 3"	8" / 3"	8" / 3"	35" Floor to Mantel	19" / n/a
Maximum Observed Steady State Efficiency (NG / LP)	78.5% / 79.0%	78.8% / 79.5%	79.0% / 77.8%	79.0% / 80.0%	79.0% / 77.8%
Weight	155 lbs	130 lbs	105 lbs	135 lbs	175 lbs
Remote Control	Programmable Thermostatic Remote Control	Programmable Thermostatic Remote Control	Programmable Thermostatic Remote Control	Programmable Thermostatic Remote Control	Programmable Thermostatic Remote Control
Electric	Not Required	Not Required	Not Required	110V for Blower Only	110V for Optional Blower
Blower	n/a	n/a	n/a	Variable Speed Blower	Optional
Venting	20' Vertical & 10' Horizontal	20' Vertical & 10' Horizontal	20' Vertical & 10' Horizontal	2 x 3" Liners, 36' Maximum	Top or Rear Vent up to 20' Vertical & 10' Horizontal
Media	Clear / Black Reflective Glass Crystals	Clear / Black Reflective Glass Crystals	Clear / Black Reflective Glass Crystals	Clear / Black Reflective Glass Crystals	Clear / Black Reflective Glass Crystals
Options	Optional Manual Wall Switch	Optional Manual Wall Switch Optional Corner Installation Kit	Optional Manual Wall Switch Optional Corner Installation Kit	Surround Std: 38" W x 26" H Surround Med: 40" W x 29" H Surround Large: 44" W x 32" H	Top or Rear Vent

WARRANTY


LIMITED LIFETIME WARRANTY, full details available at www.solasfires.com




ONE6, shown with Stainless Steel surround




FORTY6

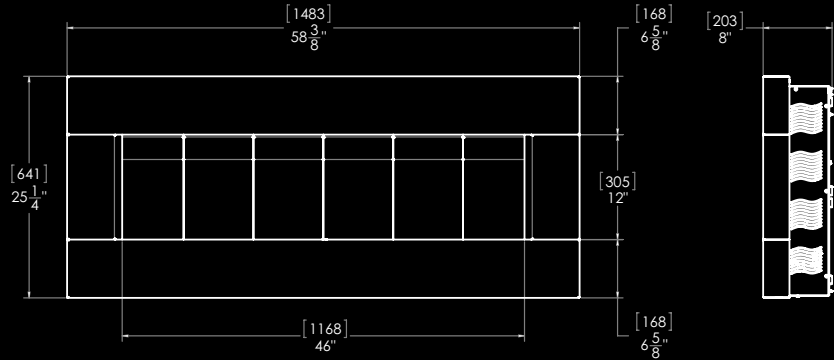


TWENTY6 FI

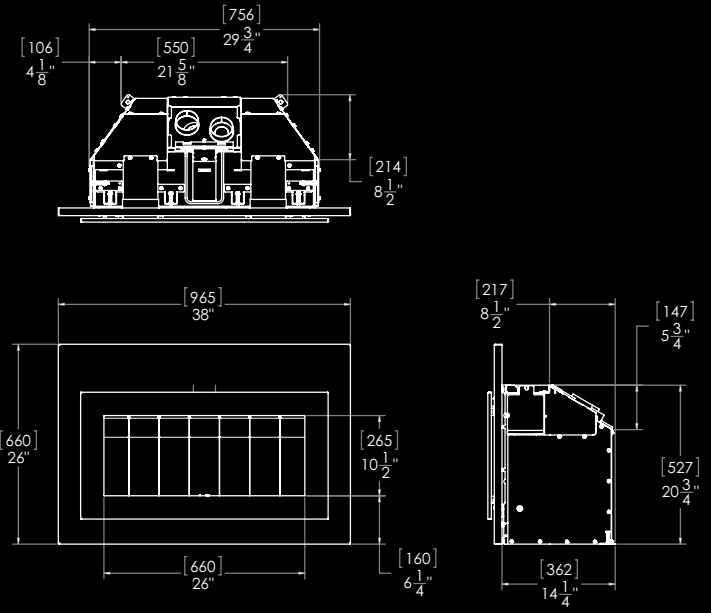


TWENTY6

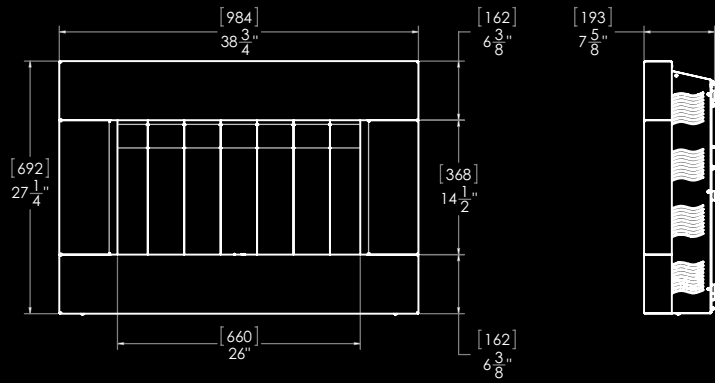

ONE6 FS

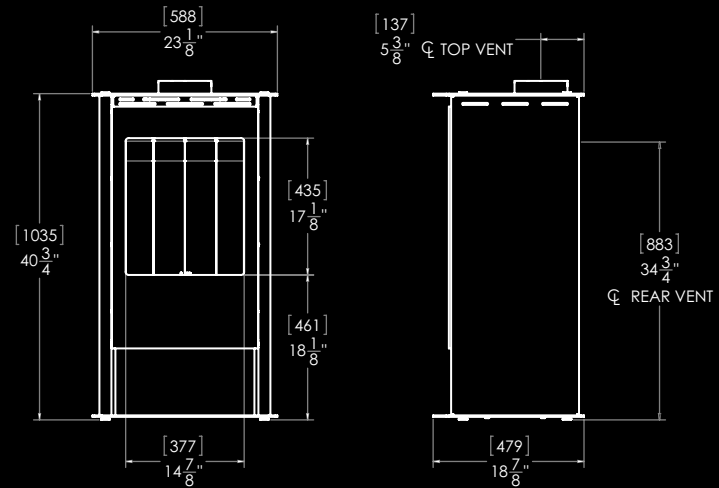

ONE6

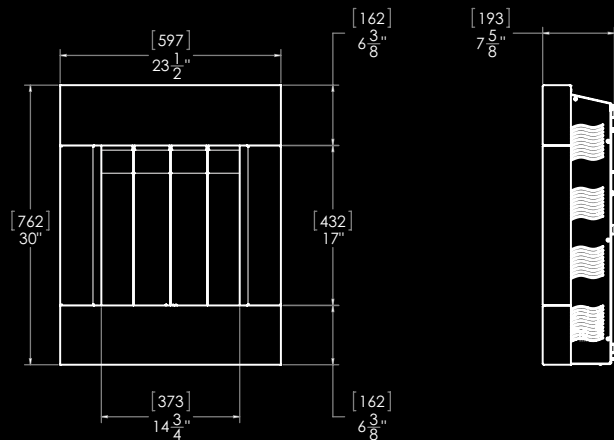

SÓLAS

CONTEMPORARY FIRE

4 TECHNOLOGY DRIVE, SUITE 5
WEST LEBANON, NH 03784

P: (603) 298-5169
F: (603) 298-9246

WWW.SOLASFIRES.COM

A Division of Progressive Manufacturing Inc.



PROUDLY DESIGNED AND BUILT IN THE USA
Product specifications subject to change without notice

Cover: FORTY6, shown with Satin Black surround