


EL80

ELECTRIC FIREPLACE



EL80

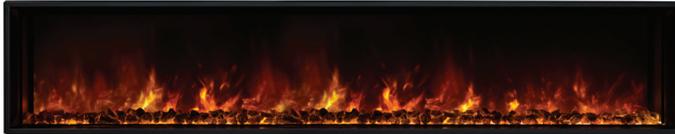


Application	Indoor	
Materials	Mild Steel with Polymer Satin Power-Coat, Tempered Glass	
Weight	69.1kg [152.3lbs] (fire unit only)	
Colour & SKU	Black	ESF.1.EL.80

TECHNICAL SPECIFICATION

Type	Electric
Volts	AC 120V/60Hz
Amps	13.4 Amps
Watts	1530W
Low Heat	750W
High Heat	1500W
No Heater	100W
Lamps	LED
Rotor Motor	AC 120V/60Hz 4W

Read the manual carefully before operating. Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

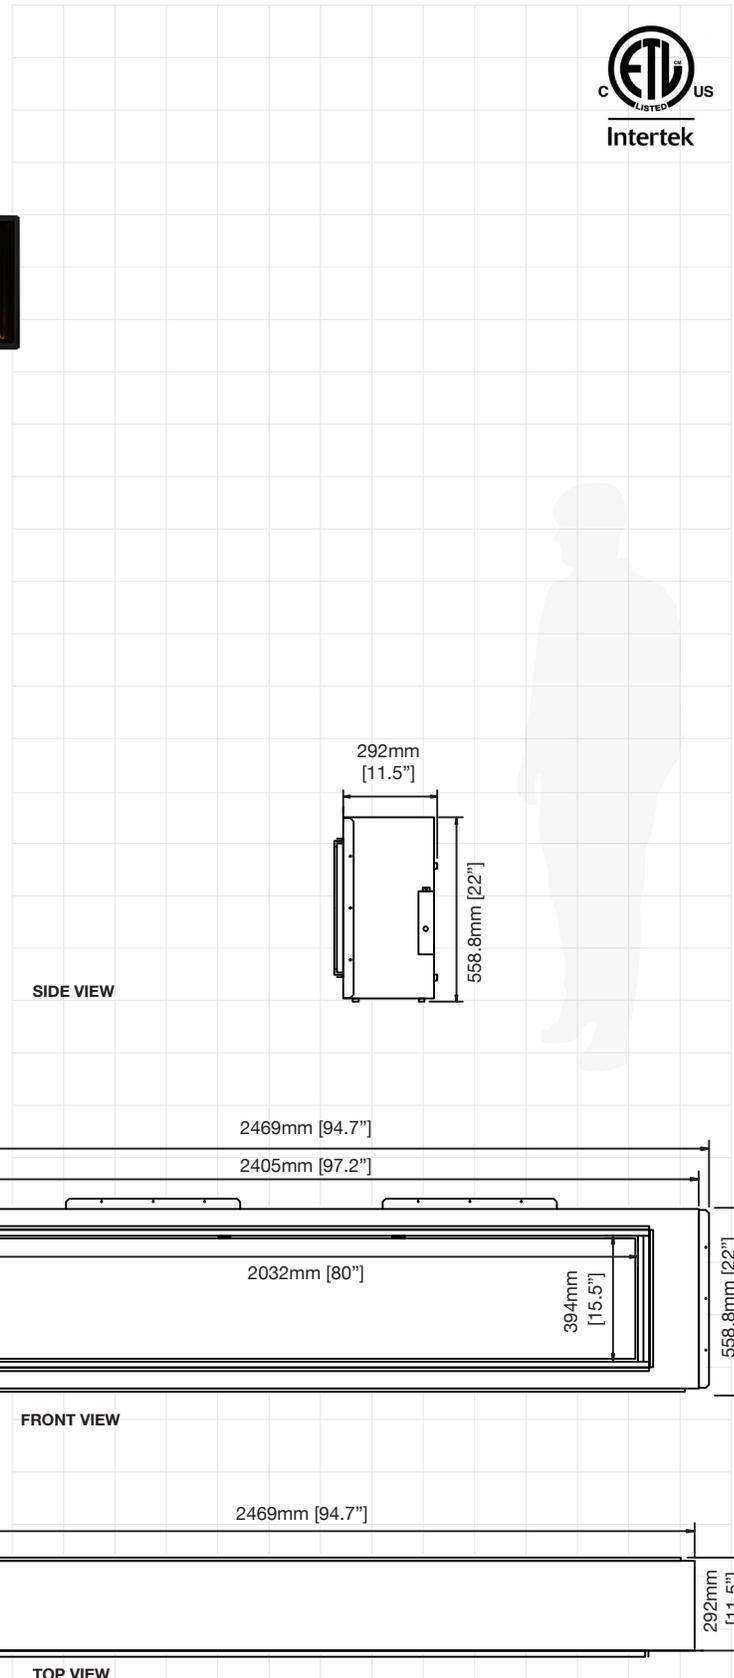

ELECTRIC FIREPLACES

FRAMING SPECIFICATIONS

Table A: FRAMING DIMENSIONS

Prepare the framed opening using wood or metal studs according to the table below.

MODEL	W	H	D
EL40	55 3/4" 1416mm	23" 584mm	12" 304.8mm
EL60	75 3/4" 1924mm	23" 584mm	12" 304.8mm
EL80	95 3/4" 2432mm	23" 584mm	12" 304.8mm
EL100	115 3/4" 2940mm	23" 584mm	12" 304.8mm
EL120	135 3/4" 3448mm	23" 584mm	12" 304.8mm


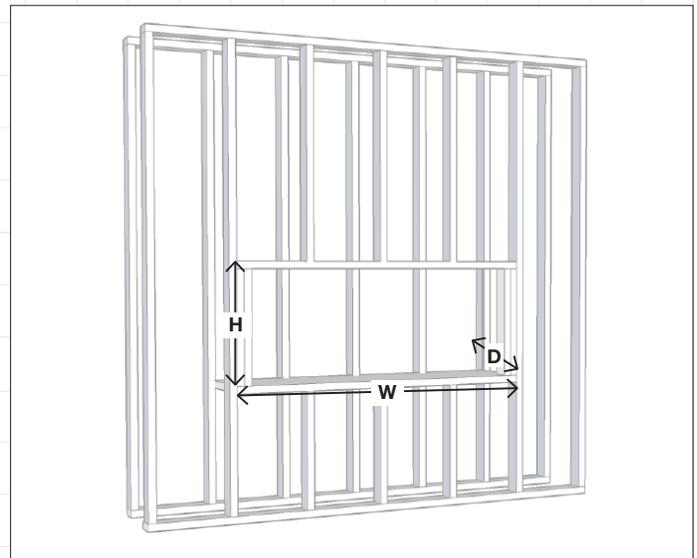


Table B: SURROUND / FINISHING DIMENSIONS

Prepare the finishing material around the viewing area according to the table below.

MODEL	W	H	D
EL40	42 5/8" 1,082.7mm	16 5/8" 422.3mm	N/A
EL60	62 5/8" 1,590.7mm	16 5/8" 422.3mm	N/A
EL80	82 5/8" 2,098.7mm	16 5/8" 422.3mm	N/A
EL100	102 5/8" 2,606.7mm	16 5/8" 422.3mm	N/A
EL120	122 5/8" 3,114.7mm	16 5/8" 422.3mm	N/A

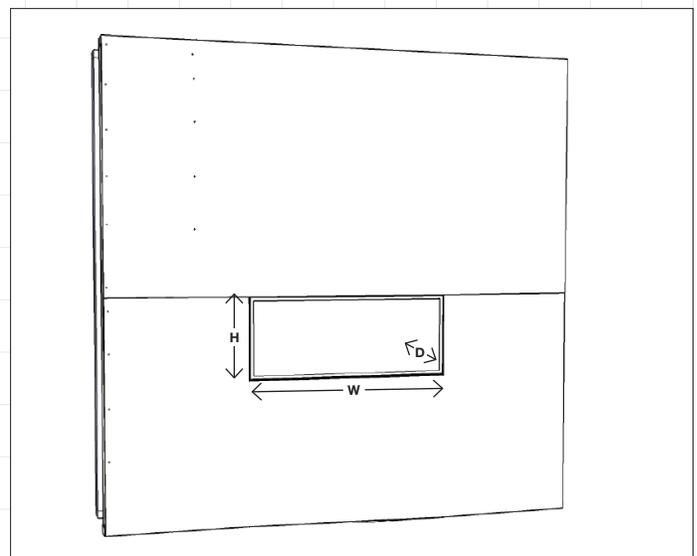

Physical model dimensions should be verified against cut out dimensions BEFORE cutting surround materials.