



# RPK3E - Remote Ready "EASY" Control

General Assembly, Installation, and Operation Instructions for use with Natural Gas Burners:  
F, FX, CS, CXF, TNA or Propane Gas Burners: FA, FAX, CA, CXFA, TNA/LP

# Rasmussen GAS LOGS & GRILLS

12028 E. PHILADELPHIA ST. WHITTIER CA 90601 U.S.A.  
www.rasmussen.biz

LISTED BY  
**ADCO**  
CERTIFICATION • LISTING  
TESTING • INSPECTION  
LISTING NO. 1180

FORM: RPK3E-9-06


**ATTENTION! READ INSTRUCTIONS CAREFULLY BEFORE ASSEMBLY**  
**INSTALLER:** LEAVE THIS MANUAL WITH THE APPLIANCE • **CONSUMER:** RETAIN THIS MANUAL FOR FUTURE REFERENCE

## REQUIRED TOOLS AND MATERIALS

Adjustable Wrench, Pipe Wrench, Flat Head Screwdriver, Phillips Screwdriver, Pipe Sealing compound  
(Only required if fittings not already prepared with pre-wrapped Teflon thread tape).

## RPK3E PARTS LIST

1. Air Mixer for LP Gas Burner Inlet Assembly (MA2)
2. Burner Orifice #53,49 and 45 (01-XX)
3. Internally Tapped 3/8 Flared x 3/8 MIP Elbow (A2T)
- 4a. Pilot Support Bracket for F & TNA burners (PB-1)
- 4b. Pilot Support Bracket for CS & CXF burners (PB-2)
5. 10-32 x 3/8 bolts (qty. 3)
6. 10-32 Hex nut (qty 1)
7. Valve Plug ( used when replacing, servicing or upgrading Motor Drive) (VALVE PLUG EASY).
8. Valve Knob Extender (STV-KE2)
9. "EASY" Safety Valve (STV-10) & Heat shield (HS-ST1)
10. Pilot Thermocouple Assembly (J95R -NG or -LP)
11. 10" flex Connector (SSCB-10)
12. Remote Receiver (BPR2)
13. Ceramic Log House (RH2) (Sold Separately)

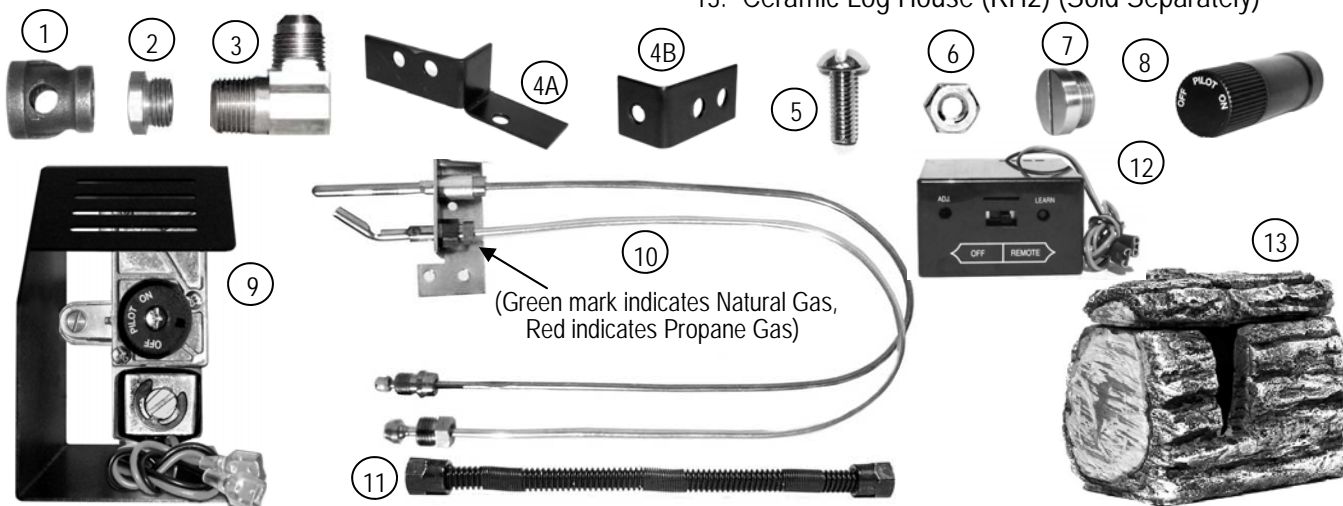

## WIRELESS REMOTE OPTIONS (each sold separately)

Wireless On/Off  
Remote with  
Thermostat  
(THR-2R)



Wireless Wall  
Thermostat  
(TS-2R)



Wireless Wall  
Switch  
(WS-2R)




Wireless Wall Timer  
(30/60/120 Minutes)  
(WT-2R)



## UPGRADE OPTION

### "RE" "Variable Flame Height" Remote Control Upgrade Kit (RE-UP1)

Kit to upgrade from "ME" or "SE" to "RE" functionality.  
Includes: DC Motor Drive, Receiver, Transmitter  
and batteries.

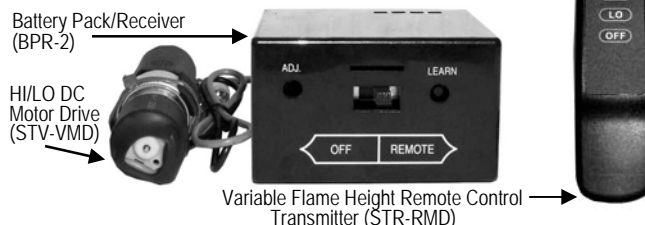


What sets Rasmussen Safety Pilot Kits apart from those of other manufacturers, aside from quality, is the ease and affordability with which our valve can be upgraded from manual operation to one of several remote control devices!

## ASSEMBLY

### STEP ONE: BURNER PAN FITTINGS (Figure 1)

**NOTE:** If fittings do not come pre-wrapped with Teflon threaded tape, pipe compound must be applied to the non-flared threads.



1. Ensure that the **BURNER PLUG** (Figure 1A.) is inserted into the opposite end of the **BURNER PIPE** (Figure 1B) and wrench tightened.
  2. Thread the Natural Gas or Propane Burner Pan Inlet Assembly into the **BURNER PAN** (Figure 1C).
- **Natural Gas Burners (NG)** (F, FX, CS, CXF, TNA) Insert the **BURNER ORIFICE** (Figure 1D) into the **INTERNALLY TAPPED 3/8 FLARED x 3/8 MIP ELBOW** (Figure 1E) and wrench tighten. (Orifices and Fittings are provided with the Burner Pan)
  - **Propane Burners (LP)** (FA, FA-X, CA, CXFA, TNA/LP) requires **MA** (Figure 1F) or **MA-2** (Figure 1G) **AIR MIXER ASSEMBLY**. Insert the Internally Tapped 3/8 Flared x 3/8 MIP Elbow and wrench tighten. Thread the Air Mixer onto the 3/8 Flared x 3/8 MIP Elbow and wrench tighten with air intake hole positioned horizontally and parallel with the floor.

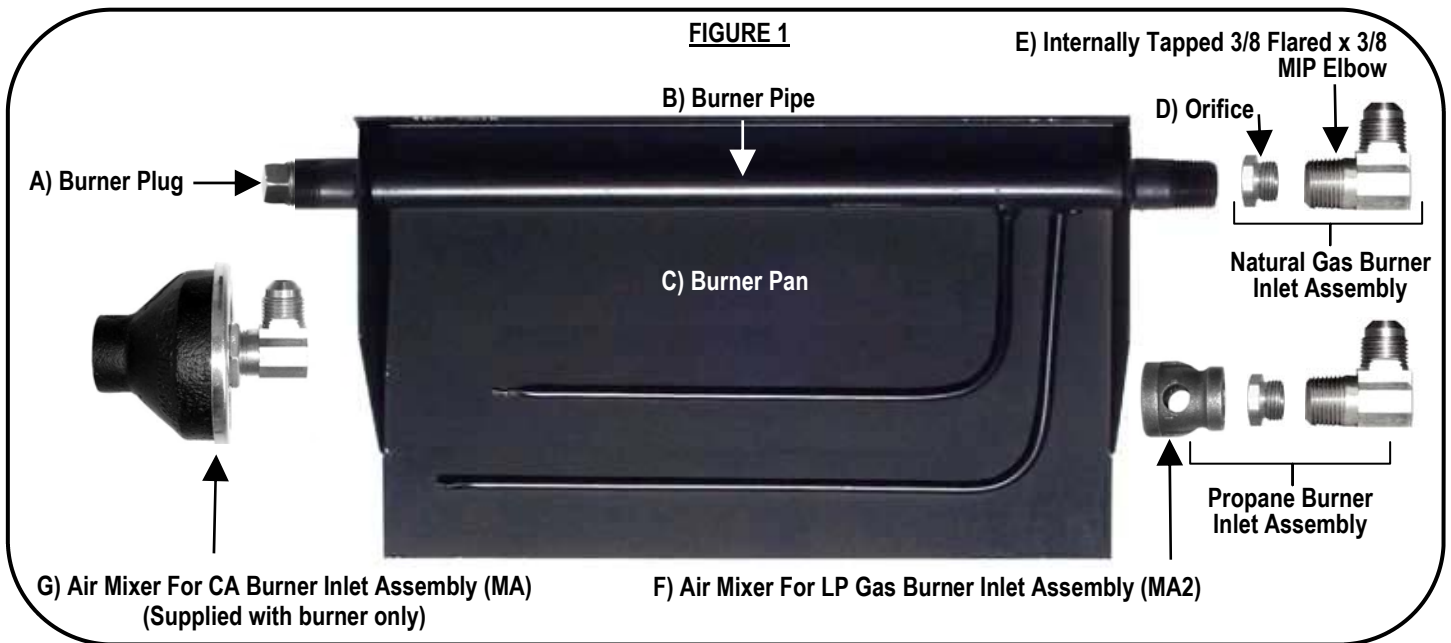


### STEP TWO: ATTACH PILOT (Figures 2 thru 5)

**NOTE:** The following pilot attachment instructions apply to each burner model shown in Figures 2 thru 5.


With the **PILOT THERMOCOUPLE ASSEMBLY** (Figure 2A) attached to the **PILOT SUPPORT BRACKET** (Figure 2B), insert the **10-32 BOLTS** (Figure 2C) through the pre-drilled holes of the Pilot Support Bracket and into the threaded holes of the Pilot Thermocouple Assembly (Figure 2A). Tighten with flathead screwdriver.

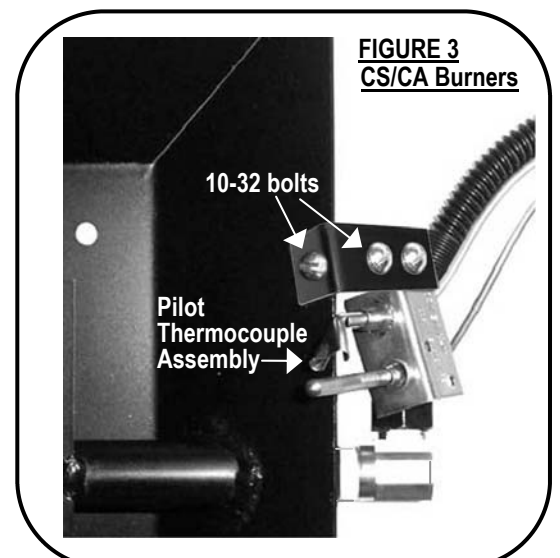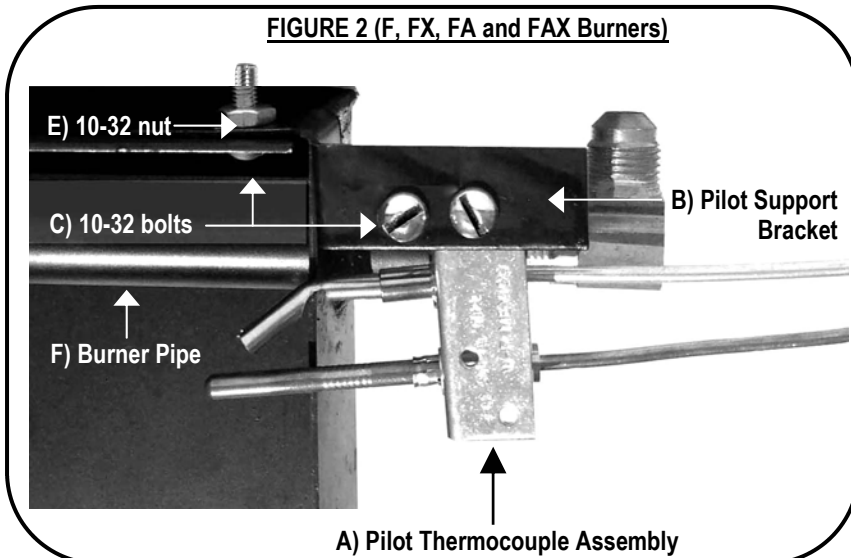

**FIGURE 4 (CXF AND CXFA Burners)**

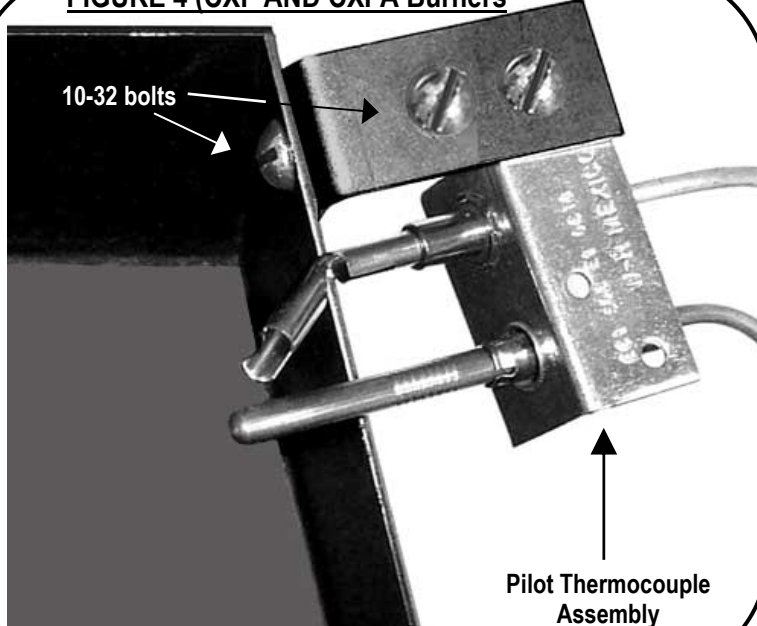


**FIGURE 5 (TNA / TNA-LP Burners)**

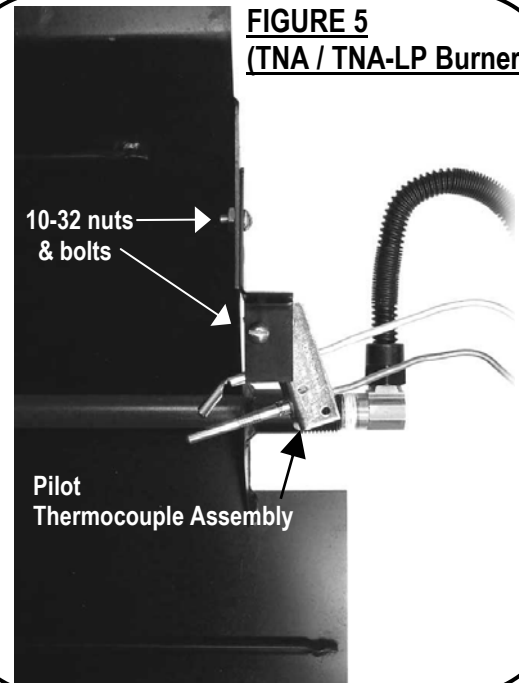

**FIGURE 6**

**STEP THREE: CONNECT BURNER AND PILOT GAS SUPPLY**

Connect **10" FLEX CONNECTOR** (Figure 6A) between the flared ends of the **VALVE OUTPUT 3/8 FLARED FITTING** (Figure 6B) and the **BURNER INPUT 3/8 FLARED 3/8 x MIP ELBOW** (Figure C). Bend the 10" Flex Connector to the optimum Valve position (forward and to the side of the Burner pan, low to the floor).

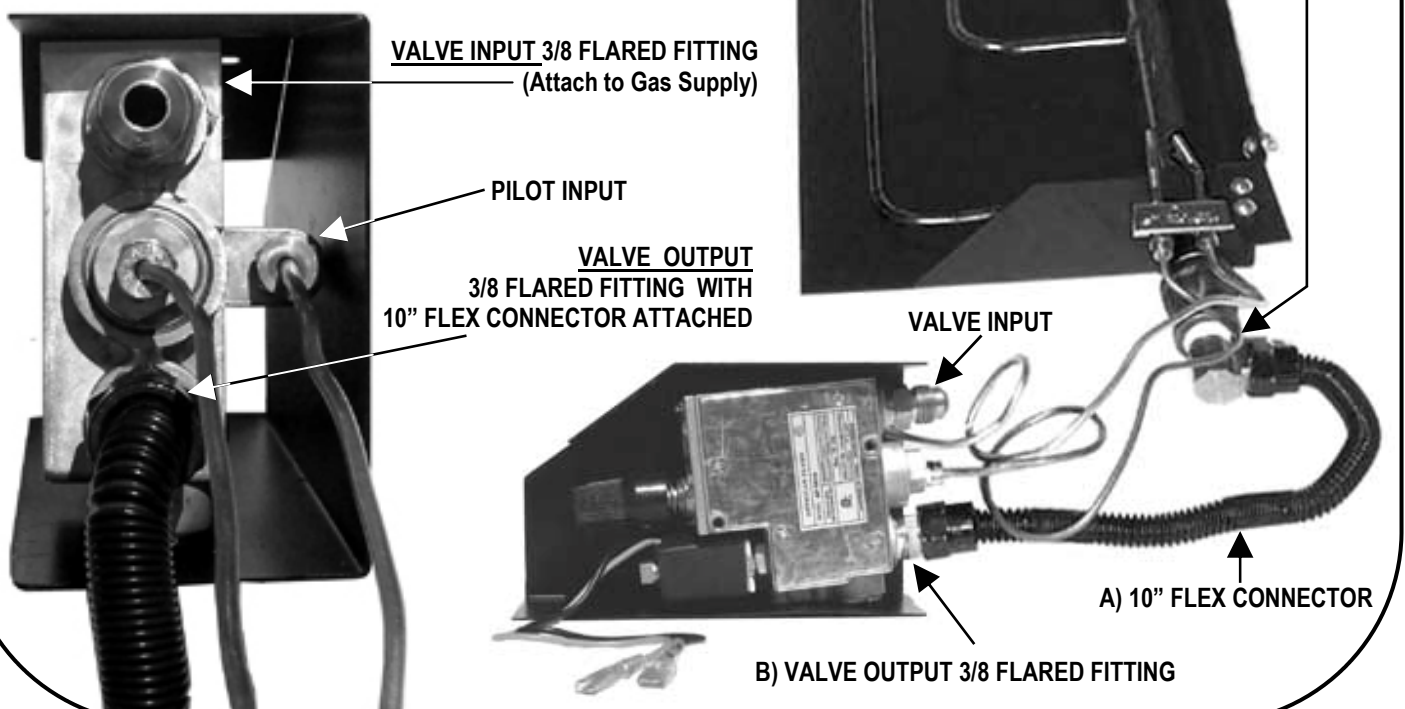


### WARNING

- **DO NOT** remove Heat Shield (Figure 7A) . It is intended to prevent premature valve failure and voiding of warranty. Replace immediately if removed for any reason.
- The “EASY” Safety Control Valve must be protected to a maximum ambient temperature of 225° F. Excessive heat to the valve is indicated by melted plastic or wiring on the valve body and is not warrantable.
- Allow an adequate period of cooling after use before closing glass doors.
- **NEVER** operate your gas log set with glass doors closed.
- **DC POWER FROM THE RECEIVER OPERATES THIS UNIT. DO NOT CONNECT TO A 115V AC LINE. SAFETY CONTROLS DAMAGED BY HEAT OR AC ARE NOT COVERED BY WARRANTY.**

**FIGURE 7**

### **SUGGESTED FIREBOX LAYOUT AND REQUIRED PARTS**

The “EASY” Safety Valve (Figure 7B) and Remote Receiver (Figure 7C) are both adversely affected by heat and must be placed as **far forward and to the side of the burner pan as possible** (bottom right). The “EASY” Safety Valve may also be placed open face side down with heat shield up as shown in Figure 7D. Our optional **Ceramic Log House** accessory (Figure 7E), offers heat protection for the Remote Receiver while being pleasing to the eye. When connecting receiver to “EASY” Safety Valve be sure to match red and black connectors (Figure 7F, red to red and black to black).

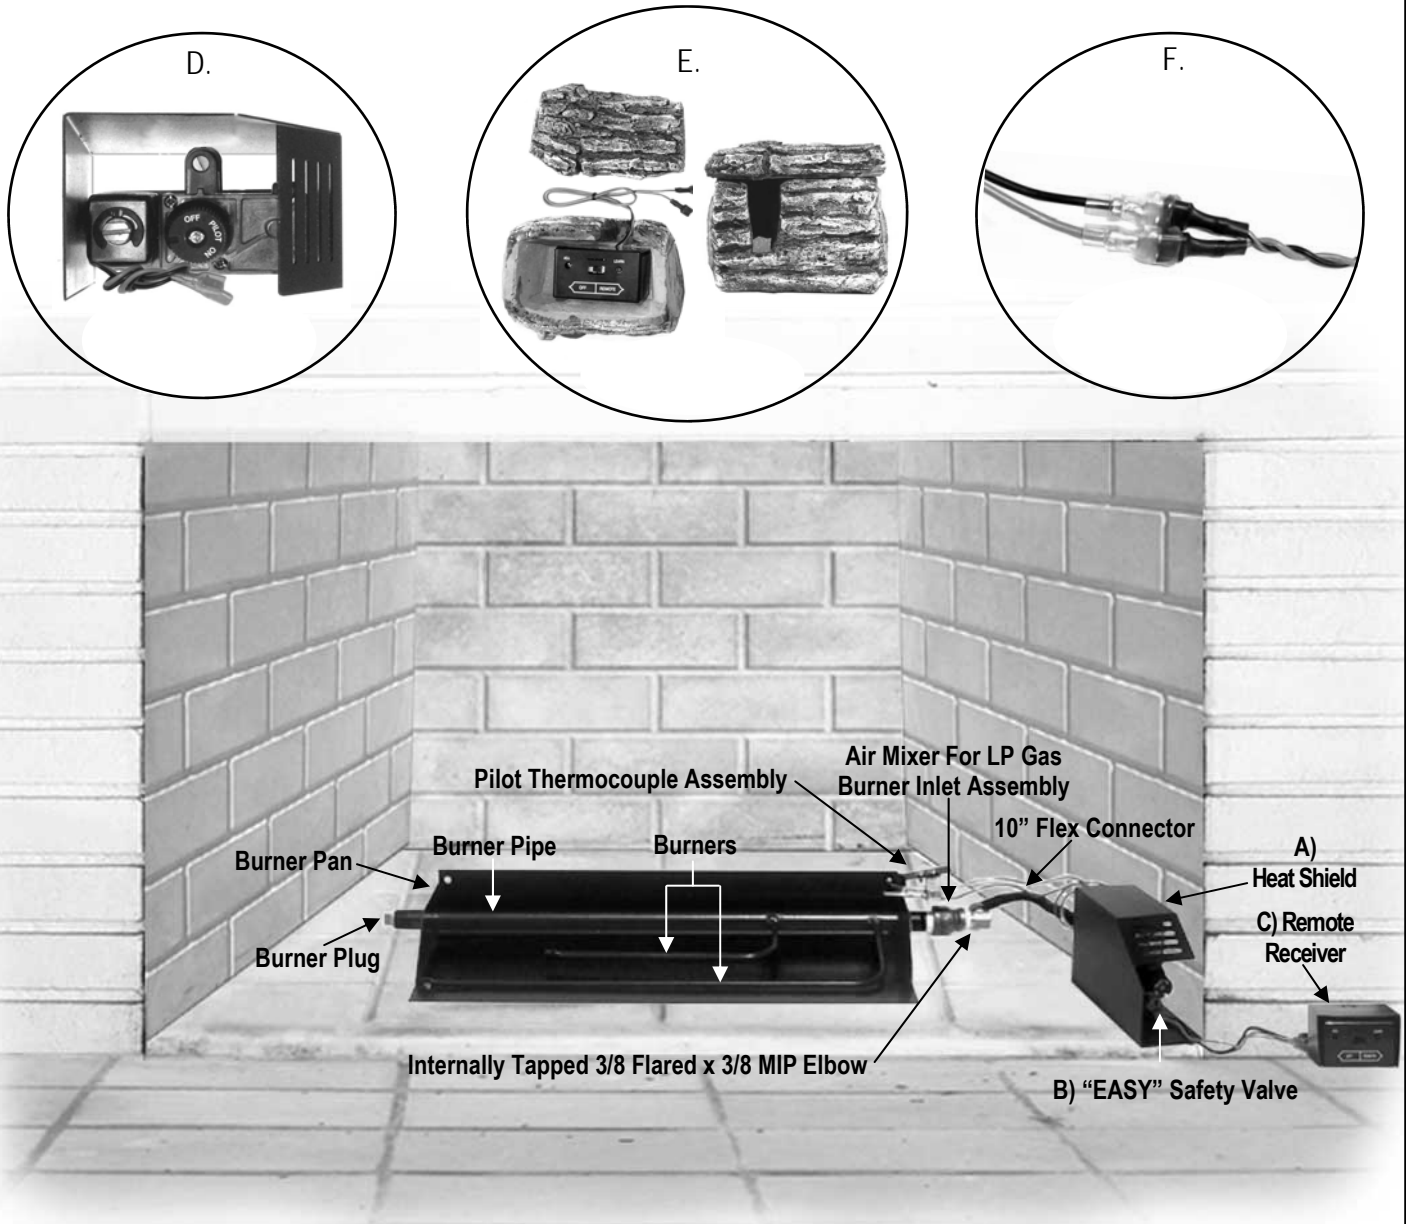





## FURTHER SAMPLES OF FIREBOX LAYOUT

Each shown with "EASY" Safety Valve and Receiver placed as **far forward and to the side of the burner pan as possible**.


### TNA STYLE BURNER

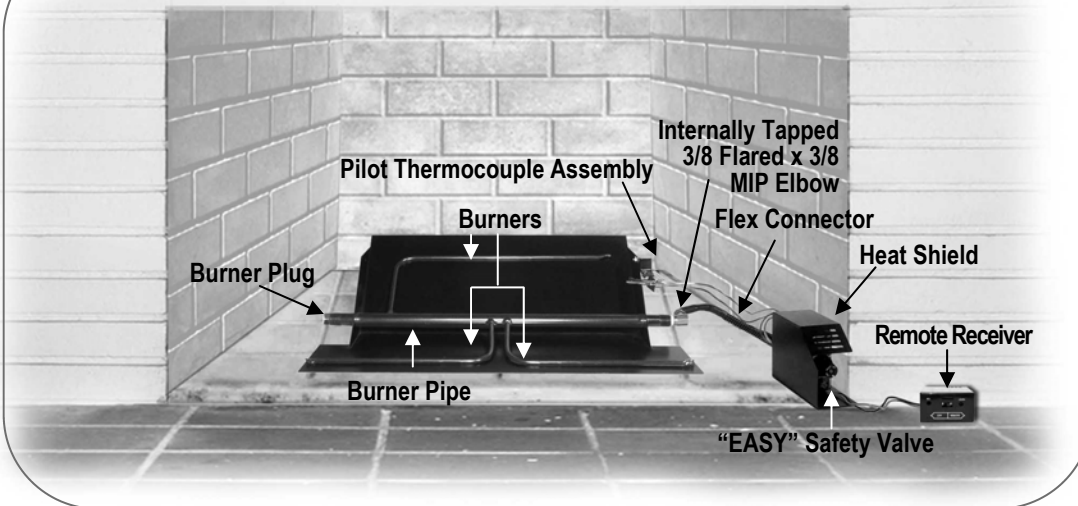

### CXF AND CXFA STYLE BURNER

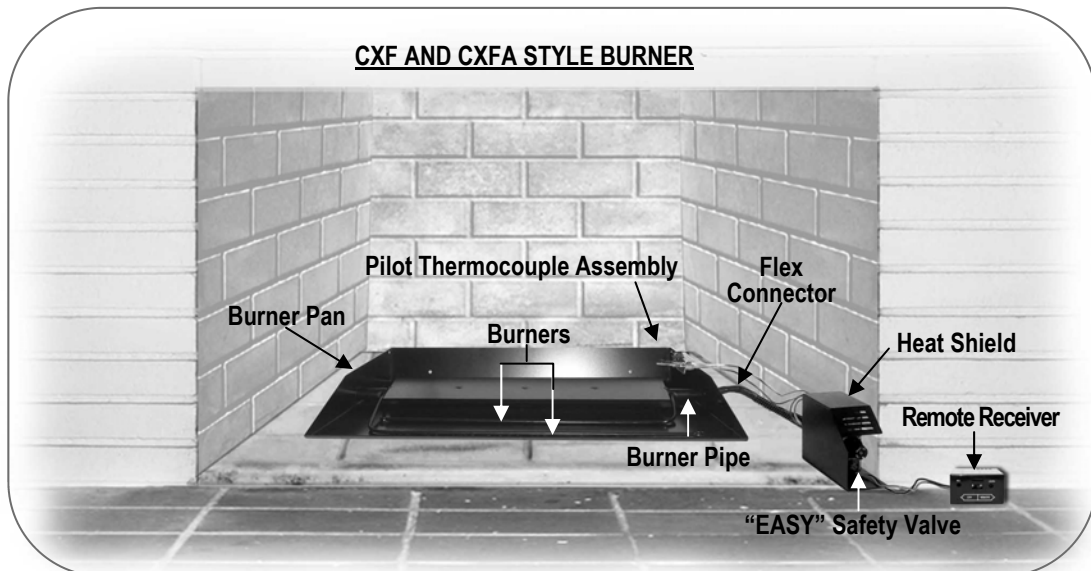

### CS AND CA STYLE BURNER

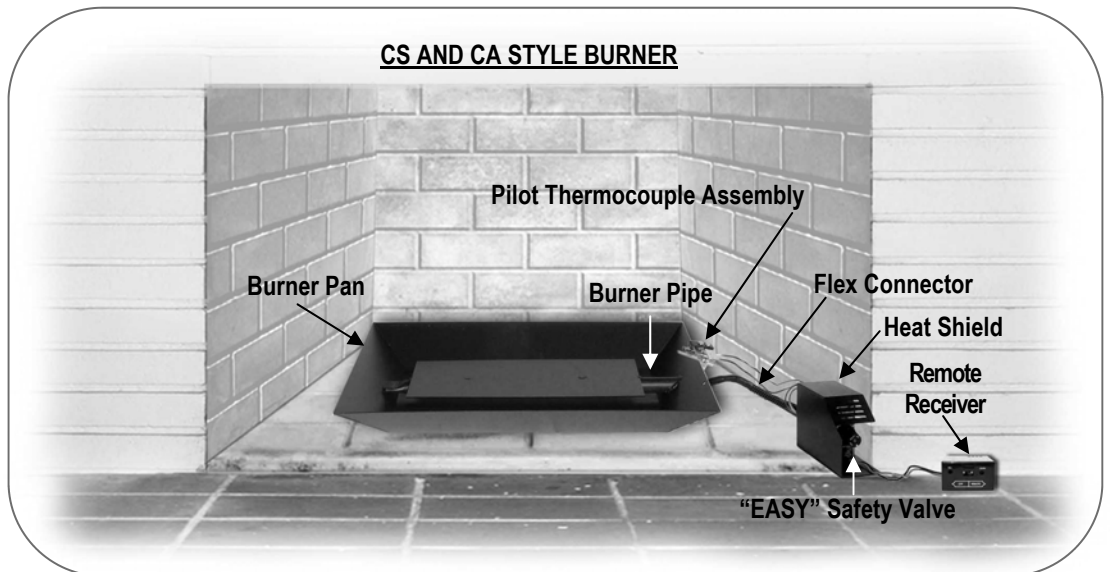

**IMPORTANT!**  
**CHIMNEY DAMPER MUST BE WIDE OPEN! THE FLUE MUST VENT ALL PRODUCTS OF COMBUSTION.**  
**DAMPER AND GLASS DOORS MUST BE FULLY OPEN BEFORE LIGHTING OR BURNING FOR PROPER VENTILATION AND TO PREVENT HEAT DAMAGE TO VALVE.**


**NOTE:** The **VALVE KNOB** has complete control of gas to the pilot and burner. It cannot be turned to “OFF” without first depressing dial to the “PILOT” position and then rotating clockwise to “OFF” (see figure 8A).

## LIGHTING AND OPERATION


### STEP ONE: PILOT LIGHTING

1. Turn **VALVE KNOB** (Figure 8A) to “PILOT” position.
2. Depress and hold until air is bled and gas flows to Pilot (Figure 9A).
3. Light Pilot with a Match or Lighter.
4. Once Pilot is lit, continue to depress and hold until the Pilot flame remains lit (approximately 30 to 60 seconds).
5. If Pilot does not remain lit, depress and turn Valve Knob clockwise to “OFF” position and wait at least 5 minutes to allow gas to dissipate. Repeat steps 1 thru 4.

**FIGURE 8 “EASY” SAFETY VALVE**

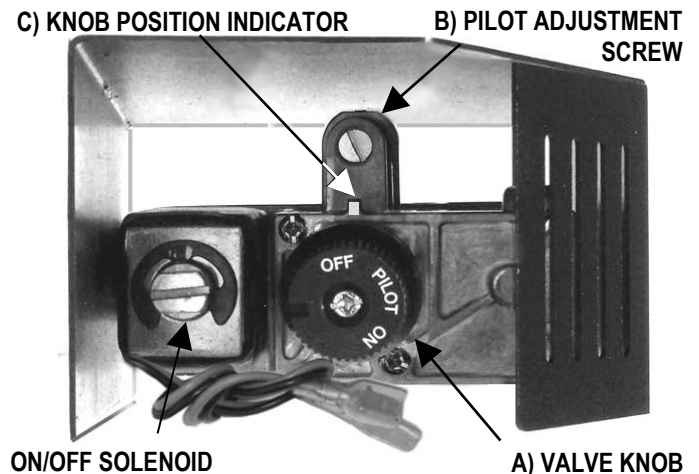

**FIGURE 9**

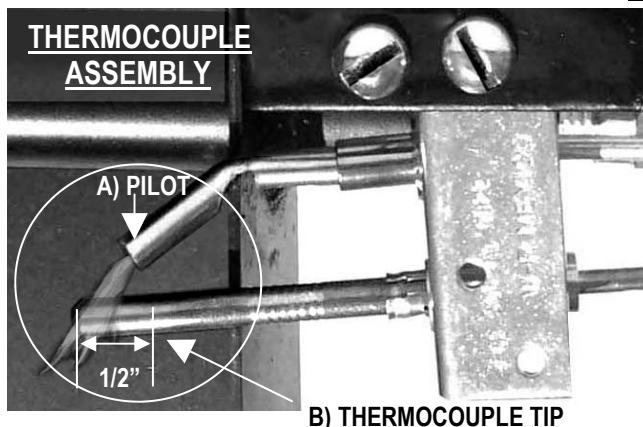


### STEP TWO: PILOT ADJUSTMENT

1. The Pilot flame should be steady, surrounding the **THERMOPILE TIP** (Figure 9B).
2. If pilot flame adjustment is necessary, use a narrow long stem flathead screwdriver to turn **PILOT ADJUSTMENT SCREW** (Figure 8B) above.
3. Turn clockwise for less flame, counter-clockwise for more.
4. If after pilot adjustment the burner begins to shutdown, re-adjust for a longer pilot flame.

### STEP THREE: BURNER OPERATION

1. Turn **VALVE KNOB** to “ON” position (Figure 8A) above.
2. Slide switch on the **RECEIVER** (Figure 10A) to “REMOTE” position.
3. Consult Operating Instructions for Accessory Control.
4. Adjust the burner flame height by turning the valve knob clockwise to lower and counter-clockwise to raise up to full on. During the heating season leave valve knob in “PILOT” position for convenience. Otherwise, turn to “OFF” position for any prolonged non-use.

**FIGURE 10**

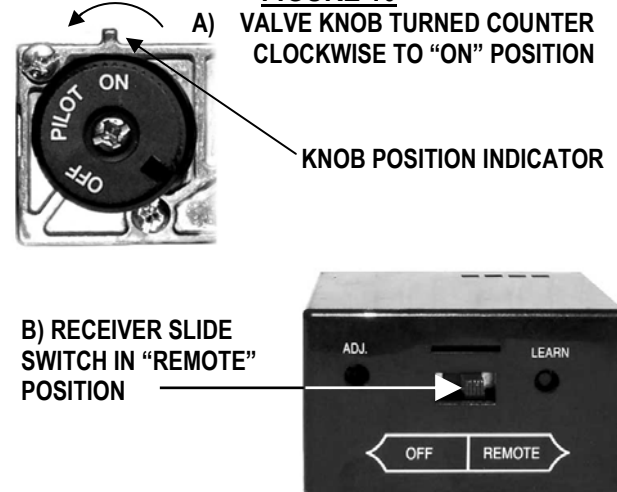

**IMPORTANT! YOUR GAS LOG SET SHOULD BE OPERATED FOR THE FIRST 2-3 HOURS AT A LOW FLAME SETTING TO ALLOW TEMPERING OF THE REFRACTORY LOGS. TO SHUTDOWN OVERNIGHT OR FOR ANY PROLONGED PERIOD, SLIDE RECEIVER SWITCH TO “OFF” POSITION (Figure 10B above)**