

Our Multi-View models offer several unique designs combining versatile style and built-in value, with the flexibility of Direct Vent or B-Vent configurations.




"The best compliment about our house is that people say it looks like us, that it reflects our family."



he Superior® Multi-View Vented Gas
Fireplace Series offers several unique
designs that create statements of taste in
any home. Paradigms of beauty and value,
these fireplaces are available in two-sided
See Through, Corner\* and three-sided
Peninsula configurations.



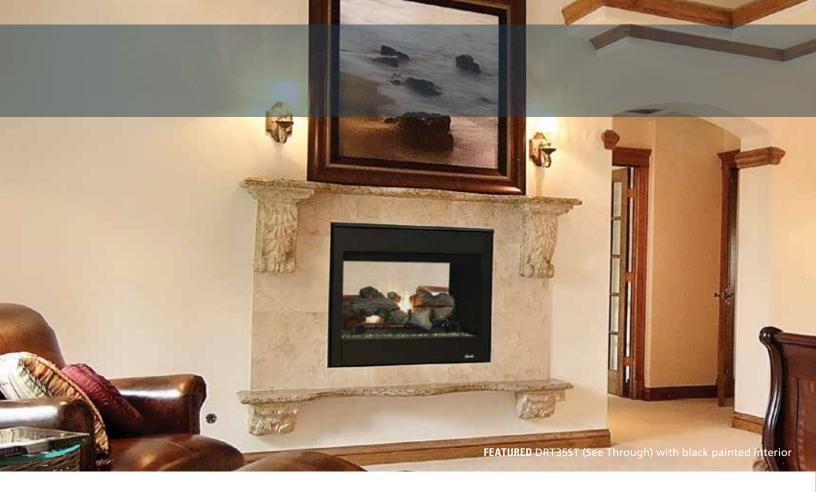

### **INTERIOR**

## (Optional)







**Optional Touch Remote** 

## **EXCLUSIVE FEATURES**

- ♠ Available in 35" clean-faced see through and peninsula models
- ♠ Combo top/rear flue configuration for all models
- Energy saving electronic ignition
- Outstanding heating efficiency for increased comfort and lower operating costs
- Standard tempered glass and a protective screen\*
- ◆ Detailed ceramic fiber "aged oak" log set with 1/2" heavy duty grate
- Black painted interior (optional ceramic fiber liner available)
- Durable textured powder coat finish
- Optional remote control available for all models
- 4 20 year limited warranty



## **INTERIOR**

## (Optional)

# Black Painted Interior






Optional Touch Remote


### DRT4000/BRT4000 MULTI-VIEW FEATURES

| DRT4000/BRT4000 MULTI-VIEW FEATURES  | DIRECT VENT | <b>B-VENT</b> |
|--|-------------|---------------|
| Listed to Z21.88 Gas Fireplace Heater  | •           |               |
| Listed to Z21.50 Decorative Gas Fireplace                                      |             | 4             |
| Available in 40" clean-faced corner, peninsula & see through models            | •           |               |
| Available in 40" clean-faced see through models only                           |             | 4             |
| Combo top/rear flue configuration  | •           |               |
| Top flue configuration   |             | A             |
| Millivolt ignition   |             | 4             |
| Energy saving electronic ignition  | •           |               |
| Pre-wired for wall switch  | •           | 4             |
| Outstanding heating efficiency for increased comfort and lower operating costs | •           |               |
| Standard tempered glass and 2015 ANSI barrier compliant                        | •           | 4             |
| Detailed ceramic fiber "aged oak" log set with 1/2" heavy-duty grate           | *           | 4             |
| Black painted interior (optional ceramic fiber liner available)                | •           | 4             |
| Durable textured powder coat finish  | •           | 4             |
| Optional remote control available for all models                               | •           | 4             |
| Uses IHP SV 4-1/2" x 7-1/2" Direct Vent Pipe                                   | •           |               |
| Uses 6" B-Vent Pipe  |             | 4             |
| 20 year limited warranty   | •           | 4             |





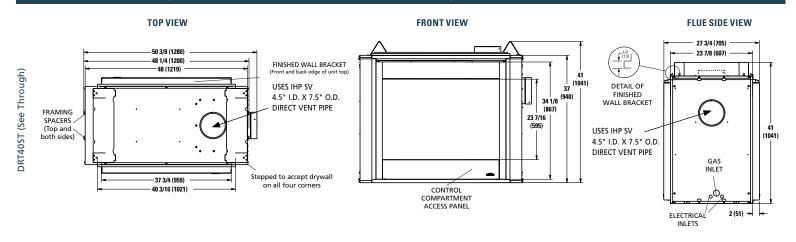






DRT40CL (Corner)


DRT40PF (Peninsula)


BRT40ST (See Through)
















### BRT40 SPECIFICATIONS (SEE INSTALLATION MANUAL FOR DETAILED FRAMING SPECIFICATIONS)









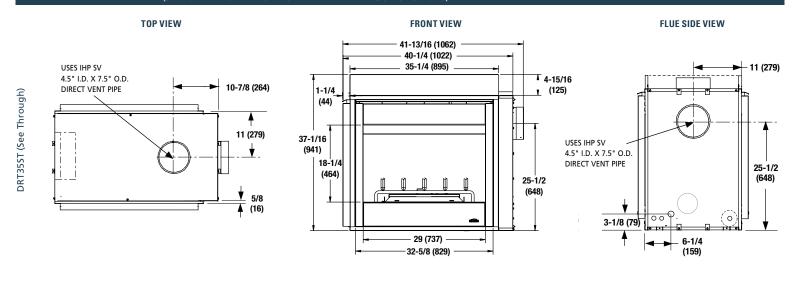

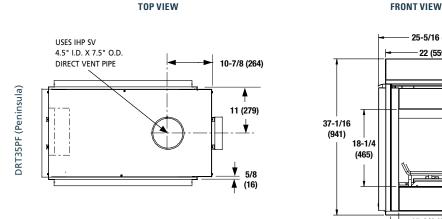





**FLUE SIDE VIEW** 

| DRT40 MULTI-VIEW FIREPLACE EFFICIENCIES — Listed to ANSI Z21.88 as a gas fireplace heater |      |        |        |                |
|---|------|--------|--------|----------------|
| MODEL   | FUEL | BTU/HR | AFUE** | P4 / ENERGUIDE |
| DRT40ST DEN   | NG   | 37,000 | 68.2%  | 57.7%          |
| DRT40PF DEN   | NG   | 37,000 | 68.2%  | 57.7%          |
| DRT40CL DEN   | NG   | 31,000 | 68.2%  | 57.7%          |
| DRT40CR DEN   | NG   | 31,000 | 68.2%  | 57.7%          |

\*\*Annual Fuel Utilization Efficiency (AFUE) is the recognized U.S. rating system for the total efficiency of heating products.

#### BRT40 MULTI-VIEW FIREPLACE EFFICIENCIES — Listed to ANSI Z21.50 as a decorative gas appliance

| MODEL       | FUEL | BTU/HR        |
|-------------|------|---------------|
| BRT40ST TMN | NG   | 30,000-37,500 |
| BRT40ST TMP | LP   | 27,000-34,000 |

| DRT35 MULTI-VIEW FIREPLACE EFFICIENCIES — Listed to ANSI Z21.88 as a gas fireplace heater |      |        |        |                |  |
|---|------|--------|--------|----------------|--|
| MODEL   | FUEL | BTU/HR | AFUE** | P4 / ENERGUIDE |  |
| DRT35ST DEN   | NG   | 30,000 | 74.8%  | 54.7%          |  |
| DRT35PF DEN   | NG   | 30,000 | 74.8%  | 54.7%          |  |

\*\*Annual Fuel Utilization Efficiency (AFUE) is the recognized U.S. rating system for the total efficiency of heating products.

#### IMPORTANT NOTES:

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

 ${\bf Diagrams, illustrations \ and \ photographs \ are \ not \ to \ scale-consult \ installation \ instructions.}$ Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.







