




**TOP VIEW**

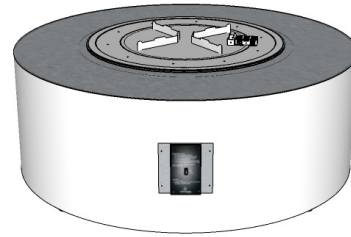

**ISOMETRIC VIEW**

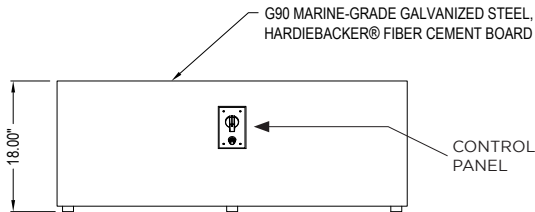

**FRONT VIEW**

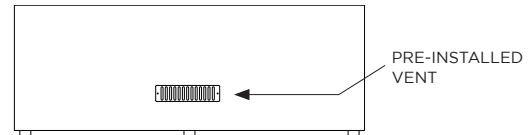

**SIDE VIEW**

**Specifications:**

ITEM NAME	BURNER INCLUDED	BTUs (LP/NG)	WEIGHT	FIRE MEDIA	CUSTOM SIZING AVAILABLE - CONTACT OGC FOR QUOTE
RTF48CDNG-K*	BI28DSING	101/100K		90 LBS	

\*LIQUID PROPANE OPTION AVAILABLE UPON REQUEST. FIRE MEDIA SOLD SEPARATELY.  
TESTING AGENCY: UNDERWRITERS LABORATORIES (UL LLC)  
STANDARD: ANSI Z21.97-02017 / CSA 2.41-2017 OUTDOOR DECORATIVE GAS APPLIANCES

**Notes:**

1. ENCLOSURES
  - 2 ea 10 sq in. vents are preinstalled on opposing sides to allow airflow through the structure.
2. CLEARANCE TO COMBUSTIBLES
  - 72" from top of burner to any overhead combustible material. 24" from edge of burner trim to any combustible side walls. 4" from bottom of burner to combustible materials.
3. GAS SUPPLY
  - Natural gas - Operating Supply Pressure: Min 6" W.C.; Max 10.5" W.C.; Ideal 7" W.C.
4. ELECTRICAL
  - RECOMMENDED: An accessible outlet is factory installed within the structure and should be connected to a GFCI circuit. Must follow local electrical code.
5. CONTROLS
  - Controls located on the Appliance Structure: Low voltage switch comes standard with DSI Burners. Optional 60-Minute Timer (PT# CF-DSI-60MT) or 4-Hour Timer (PT# 4HRTC) can replace low voltage switch.
  - Controls located away from the Appliance Structure: Outdoor-rated switches and timers (PT# CF-DSI-60MT) can be located on GFCI Circuit to control power to the junction box. Note: If operating burner with switch away from the appliance, an included switch bypass will need to be installed (PT# CF-DSI-SB).
  - Emergency Gas Shut Off: The E-Stop ships standard with the Direct Spark Ignition (DSI) burner and can be installed on the GFCI circuit to cut power to the appliance's junction box which will shut off flame.